



TDS**ERAS-80xLL-0-T25-15C****GBS-80**Torx 25 drive
Incl. EF-head mark**PRODUCT DESCRIPTION**

8.0mm diameter screw for fixing to aerated concrete with EF head mark and recess TX25. The screw has a hardened S-point and the material is steel zinc plated with a Eurofast Coat 15C which complies with 15-cycles Kesternich resistance according to **ETA-23/0651**. The recommended length into the aerated concrete is min. 60mm.

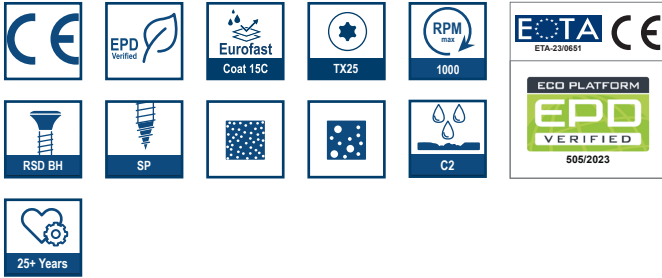

**Recommended
length into the
aerated concrete**

Min. 60mm

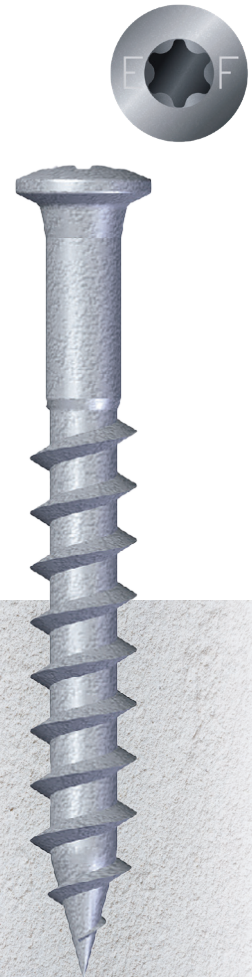

Substrate		
Aerated concrete	AAC 450 kg/m ³	EN 12602
Aerated concrete	AAC 550 kg/m ³	EN 12602
Concrete	C12/15, C20/25	EN-206-1
Chipboard	$\rho_{min}=600\text{kg/m}^3$	EN 12369-1
Installation data		
Head type:	Raised Bugle Head	
Recess:	TX25	
Anchoring depth on aerated concrete deck hef:	$\geq 60\text{mm}$	
Anchoring depth on concrete deck hef:	$\geq 25\text{mm}$	
Concrete drill diameter:	6,0mm	
Drilled hole depth in concrete:	hef + 12mm	
Fixing on wooden deck:	Full thread trough wooden substrate	
Installation force on aerated concrete deck:	15kg	
Installation tool speed on aerated concrete deck:	1000rpm	
Installation force on concrete deck:	15kg + impact	
Installation tool speed on concrete deck:	100rpm	
Installation force on wooden deck:	30kg	
Installation tool speed on wooden deck:	2000~2500rpm	

TECHNICAL DATASHEET

PRODUCT GROUP												SCREW Ø												SCREW LENGTH												DRILLING CAPACITY												HEAD TYPE												COATING/MATERIAL												PACKAGE TYPE												PACKAGE QUANTITY												PRODUCT KEY	PREVIOUS PRODUCT KEY
ERAS	-	80	065	-	0	-	T25	-	15C	-	B	500	ERAS-80065-0-T25-15C-B500	GBS-80065																																																																																			
ERAS	-	80	090	-	0	-	T25	-	15C	-	B	500	ERAS-80090-0-T25-15C-B500	GBS-80090																																																																																			
ERAS	-	80	110	-	0	-	T25	-	15C	-	B	500	ERAS-80110-0-T25-15C-B500	GBS-80110																																																																																			
ERAS	-	80	130	-	0	-	T25	-	15C	-	B	500	ERAS-80130-0-T25-15C-B500	GBS-80130																																																																																			
ERAS	-	80	160	-	0	-	T25	-	15C	-	C	500	ERAS-80160-0-T25-15C-C500	GBS-80160																																																																																			
ERAS	-	80	190	-	0	-	T25	-	15C	-	C	500	ERAS-80190-0-T25-15C-C500	GBS-80190																																																																																			
ERAS	-	80	240	-	0	-	T25	-	15C	-	C	500	ERAS-80240-0-T25-15C-C500	GBS-80240																																																																																			